KARATLY · PACKAGING DIELINE & ENGINEERING SPECIFICATION

TWO-PIECE RIGID KEEPSAKE JEWELLERY BOX · RING & PENDANT SUITES · SCALE 1:1 METRIC

REF: KRT-P5-04 · REVISION 1.0

ENGINEERING SPECIFICATIONS

BOX STRUCTURE

Style: Rigid Two-Piece Setup Box (Shoulderless)

Core: 1200 gsm Greyboard (2.0 mm caliper)

Wrap Paper (Lid): 135 gsm Emerald Soft-Touch

Wrap Paper (Base): 135 gsm Warm Ivory Linen

Turn-ins: 15.0 mm internal wrap fold

Bleed Allowance: 3.0 mm on all wrap perimeter edges

FINISHING & BRANDING

Outer Lid: Blind-debossed octagonal facet frame

Foil Stamp: 18 mm Octagon K Monogram (FOIL_GOLD)

Inside Lid: 'Made to be kept.' Cormorant Garamond 9pt

Base Underside: 28 x 12 mm laser HUID hallmark zone

INTERIOR VELVET CUSHION

Substrate: High-density EVA wrapped in emerald velvet

Ring Insert: Precision 32 mm central slit with tension lip

Pendant Insert: Dual 45-deg shoulder notches & ribbon pad

CAD DIELINE LAYERS / SPOT COLORS

--- [CUT] 100% Magenta solid 0.75pt


- - [CREASE] 100% Cyan dashed 0.75pt


... [BLEED] Grey dotted 0.5pt (3 mm boundary)


=== [FOIL_GOLD] Metallic hot-stamp foil (#D4AF37)

::: [DEBOSS] Blind deboss depth 0.4 mm

<-> [DIMENSIONS] Technical drafting annotations

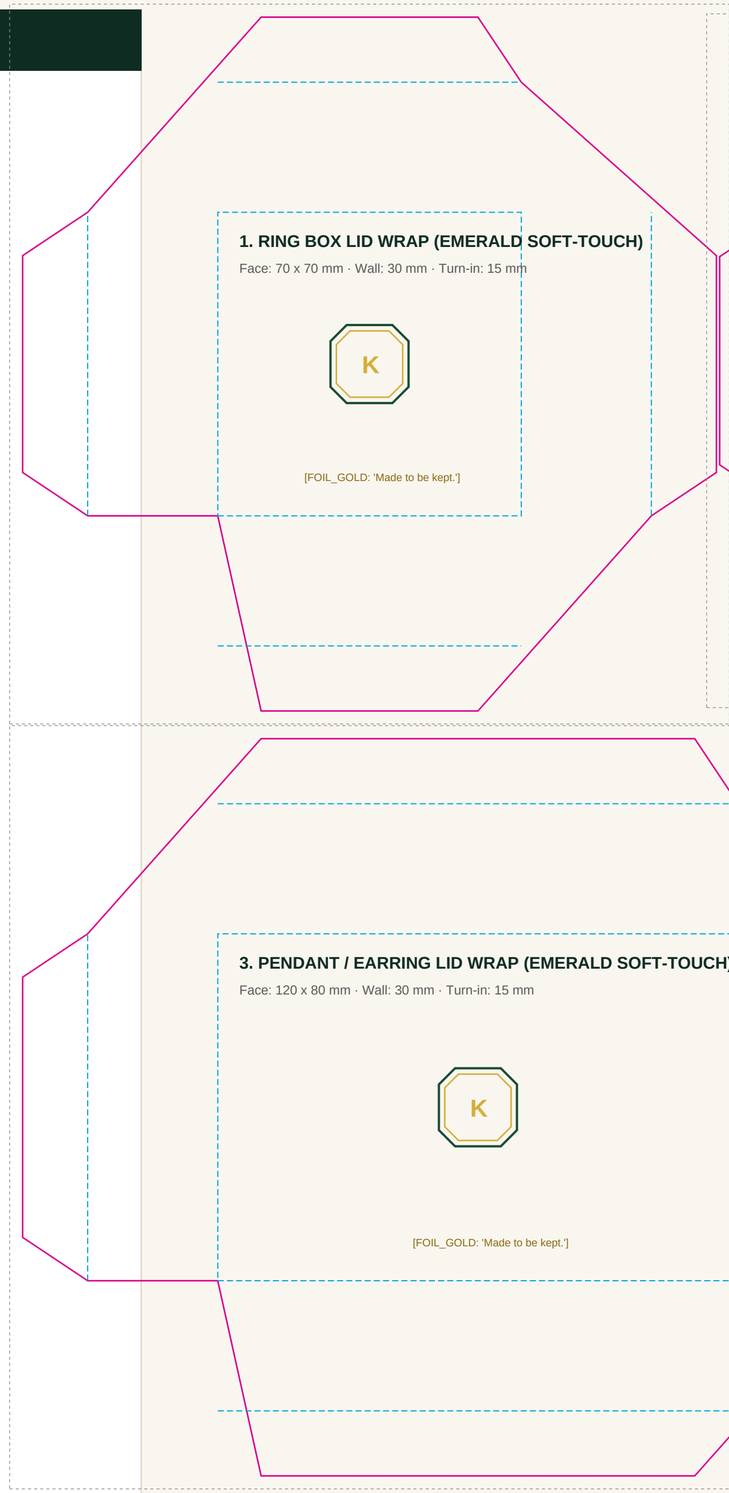

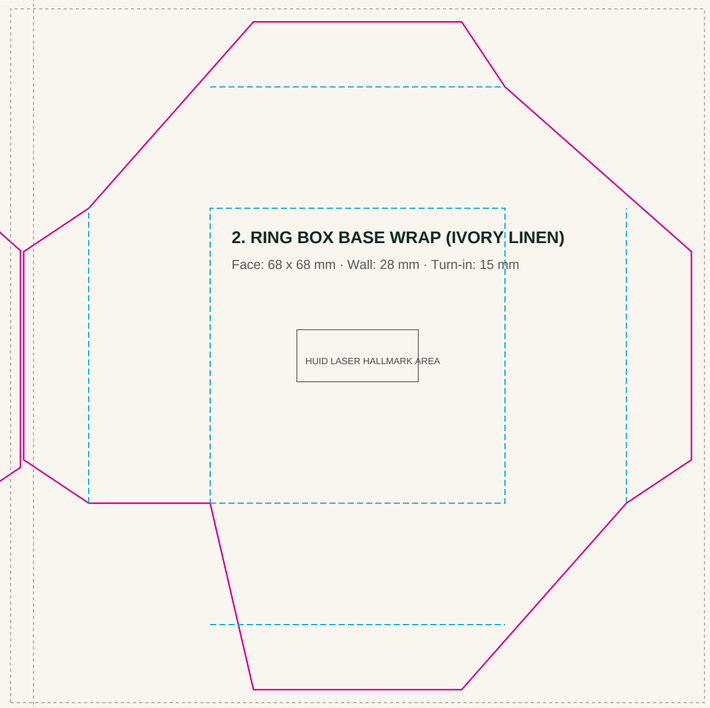

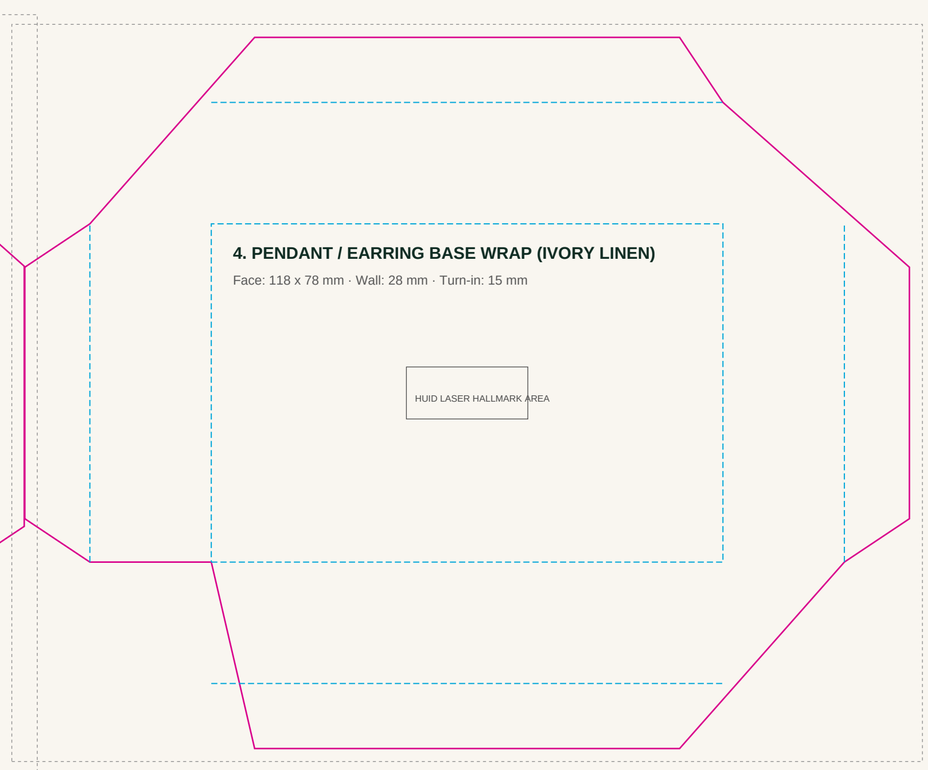

VELVET FOAM INSERT SPEC

Substrate: 20 mm High-Density EVA

